GE Medical Systems

CPI INDICO 100-50 / RFX / RADIOGRAPHIC SUITE

GENERAL NOTES

- ALL SPECIFICATIONS AND SPACE REQUIREMENTS ARE SHOWN GENERICALLY. CONTACT GAMMA TECHNOLOGIES FOR SPECIFIC REQUIREMENTS PERTAINING TO OPTIONAL EQUIPMENT COMPONENTS AND ADDITIONAL ROOM PREPARATION SPECIFICATIONS.
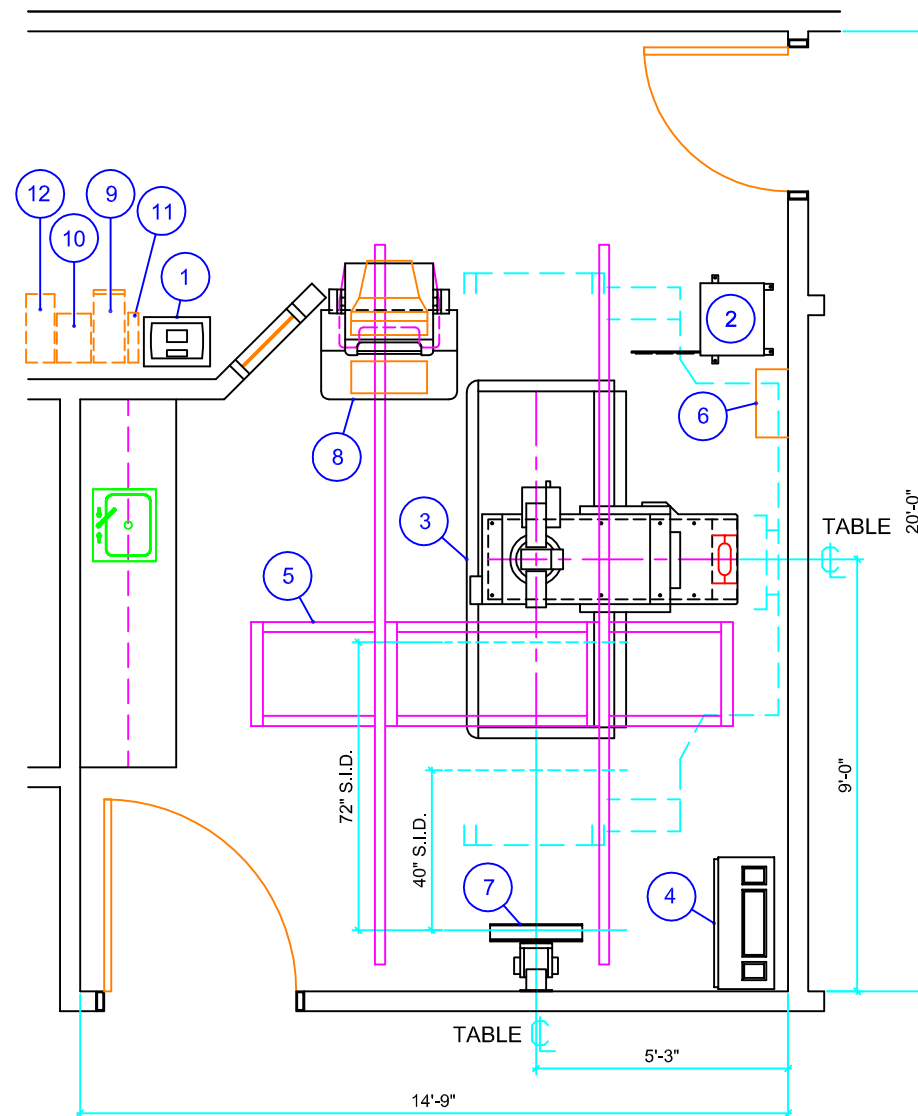
EQUIPMENT SCHEDULE

EQUIPMENT IDENTIFICATION NUMBER

NOTES			DESCRIPTION	BTU / HOUR	DIMENSIONS (IN.) W x D x H			WEIGHT (LBS.)
OFOI	1	150	CPI INDICO 100 SERIES HIGH FREQUENCY GENERATOR CONTROL CONSOLE (COUNTER MOUNTED)		16.60	12.30	3.70 DOES NOT INCLUDE PEDESTAL	11
OFOI	2	4000	CPI INDICO 100 SERIES HIGH FREQUENCY GENERATOR CONTROL CABINET		18.00	16.00	48.70	235
OFOI	3	1200	GENERAL ELECTRIC MEDICAL SYSTEMS RFX 90/90 R&F TABLE		90.00	68.00	60.00	3000
OFOI	4	1200	GENERAL ELECTRIC MEDICAL SYSTEMS RFX TABLE UNIVERSAL SYSTEMS CABINET		33.00	15.00	79.00	950
OFOI	5	1200	GENERAL ELECTRIC MEDICAL SYSTEMS XT RADIOGRAPHIC SUSPENSION WITH INBOARD MOUNTINGS		228.00	120.50	94.00 MODIFIED TO FIT ROOM BY SUPPLIER	941
OFOI	6	200	GENERAL ELECTRIC MEDICAL SYSTEMS SENTRY III COLLIMATOR ELECTRONICS CABINET (WALL MOUNTED)		17.00	8.00	26.00	50
OFOI	7	200	PAUSCH BS-2000 V VERTICAL BUCKY STAND		31.61	16.73	87.79	300
OFOI	8		H.S. LIONS MODEL610 MONITOR CART WITH KEYBOARD SHELF CONTAINING THE FOLLOWING:		34.00	34.00	57.00	175
OFOI		300	INFIMED PLATINUM ONE 21" IMAGE MONITOR		16.00	19.00	17.00	
OFOI			INFIMED PLATINUM ONE PC KEYBOARD		19.00	8.00	3.00	
OFOI	9	800	INFIMED PLATINUM ONE (BENEATH COUNTER) PC CABINET		7.75	18.13	16.50	29
OFOI	10	140	INFIMED PLATINUM ONE (BENEATH COUNTER) ISOLATION TRANSFORMER		8.50	12.25	7.25	32
OFOI	11	140	INFIMED PLATINUM ONE (BENEATH COUNTER) GENERATOR INTERFACE MODULE		2.56	12.50	12.50	6
OFOI	12	140	INFIMED PLATINUM ONE (BENEATH COUNTER) UNINTERRUPTED POWER SUPPLY		7.00	17.10	8.80	57

NOTE EXPLANATION: CFCI = CONTRACTOR FURNISHED - CONTRACTOR INSTALLED
OFCI = OWNER FURNISHED - CONTRACTOR INSTALLED
OFOI = OWNER FURNISHED - OWNER INSTALLED

SCALE: 5' 4' 3' 2' 1' 2' 3' 4' 5'

TABLE ℄ 20'-0"
9'-0"
72" S.I.D.
40" S.I.D.
TABLE ℄
5'-3"
14'-9"

PLANNING BY:

GAMMA TECH, INC

129 Wild Berry Lane
Hampstead, NC 28443
Ph (910) 270-9787 • Fax (910) 270-9767
www.gammatech.net